



CMD343

E AMPS Duplexer

824 – 894 MHz

Revision 1, February 5, 2003

Receive Channel

Passband:	824 – 849 MHz
Bandwidth:	25 MHz
Freq. Spacing:	45 MHz
Insertion Loss:	1.0 dB max.
VSWR:	1.50:1 max.
RX Noise Suppression Below RX Band:	
DC – 750 MHz	60 dB min
RX Isolation at TX Freq:	
869 – 894 MHz	60 dB min.
894 – 2000 MHz	60 dB min.
Isolation Tx to Rx:	60 dB min.

Transmit Channel


Passband:	869 – 894 MHz
Bandwidth:	25 MHz
Freq. Spacing:	45 MHz
Insertion Loss:	1.0 dB max.
VSWR:	1.50:1 max.
TX Noise Suppression at RX:	
DC – 849 MHz	60 dB min.
TX Noise Suppression Above TX Band:	
968 – 2000 MHz	60 dB min.
Isolation Rx to Tx:	60 dB min.
Power:	500 Watts CW 10,000 Watts PIP

*Optional Antenna Port Coupling

-50 dB +/- 3 dB non-directional

Operation Temp: -30° to +60°C

Storage Temp: -40° to +85°C

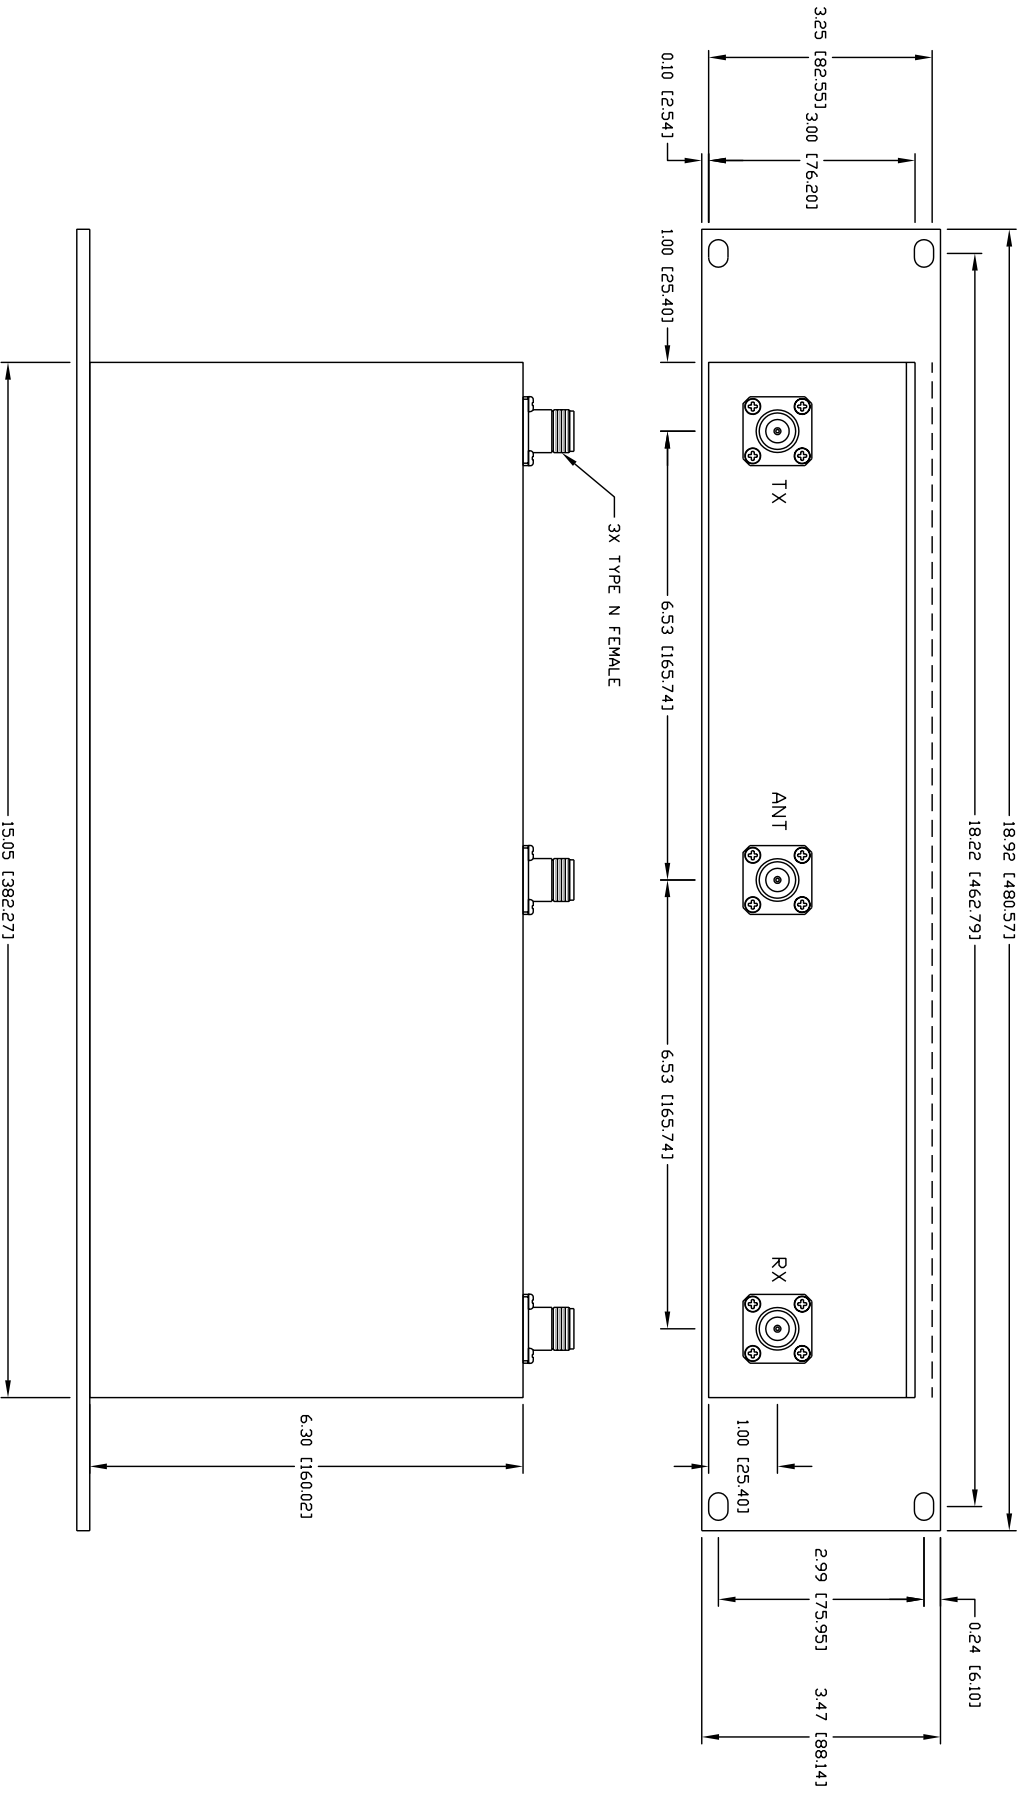

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY PROPERTY OF COMMERCIAL MICROWAVE TECHNOLOGY. THIS DOCUMENT IS RECEIVED IN CONFIDENCE AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF COMMERCIAL MICROWAVE TECHNOLOGY

COMMERCIAL MICROWAVE TECHNOLOGY, INC.

DRAWN:	MJS	02/05/2003
ENG:		
RELEASED:	MJS	02/05/2003

TOLERANCES:	.XX: ± .01
	.XXX: ± .005
	.XXXX: ± .0005
ANGLES:	± 1°

SIZE	DWG NO.	REV
A	OUTLINE CMD343	1
CAGE:	1SCX4	SHEET 1 OF 1